HYOSUNG
NAUTILUS HYOSUNG INC.

Spare Parts Manual
MX8200QTN for BAC
V01.00.00 (2017.10.18)

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

MoniMax 8200QTN

ⓒ Nautilus Hyosung Inc. All right reserved.
The content of this specification is protected by copyright laws.

Oct 18. 2017 1st Release

Revision History of System

Spare Parts List - MX8200QTN for BAC

No.	Version	Date	Description of Change	Chapter
1	V01.00.00	2017-10-18	New Publication	All

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

Change History of Spare Parts

Spare Parts List - MX8200QTN for BAC

ITEM	No of Ref.	1st Mass Production	2nd Mass Production	Remark

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

Table of Contents

Chapter 1. Fascia Assembly ····· 11

Chapter 2. Control Electronics ····· 14

Chapter 3. Bill Recycler Module (BRM) ····· 16

Chapter 4. Check Single Deposit Module (CSM 50) ····· 21

Chapter 5. Card Reader (MCU) ····· 24

Chapter 6. Receipt Printer ····· 26

Chapter 7. OPL/SPL Assembly ····· 28

Chapter 8. Safety Body ····· 31

Chapter 9. Miscellaneous ····· 33

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Part No.	DESCRIPTION	SYSTEM	Type
1	7224000256	SYSTEM:MX8200QTN:4RC:BOA	BRM50 + CSM50 + 21.5 OPL + SPR60 + Q87	A

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
1	Fascia Assembly	1	S7134000702	FRONT ASSEMBLY	○		1	Field	C
2		1-1	S4370003260	BEZEL FOR FRONT	○		1	Repair	E
3		1-2	S4370002035	BEZEL FOR BUTTON	○		1	Repair	E
4		1-3	S4370002034	BEZEL FOR VOLUME	○		1	Repair	E
5		1-4	S7130220100	Encryption PIN pad (TR39)	○		1	Repair	C
6		1-5	S4140009450	BRKT FOR EPP	○		1	Repair	D
7		1-6	S5412000054	VIVOPAY KIOSK3	○		1	Repair	E
8		1-7	S5404000019	2D BARCODE	○		1	Repair	D
9		1-8	S7650000223	SHUTTER FLICKER	○		1	Repair	E
10		1-9	S7650000236	MCU FLICKER	○		1	Repair	E
11		1-10	S5611000360	VOICE I/F BOARD	○		1	Repair	E
12		1-11	S5611000361	ADA VOLUME BOARD	○		1	Repair	E
13		1-12	S5611000211	DMIB BOARD	○		1	Repair	D
14		1-13	S5611000365	CCD CAMEARA	○		1	Repair	D
15		1-14	S4310000714	COVER FOR SHIELD - PRIVACY	○		2	Repair	D
16		1-15	S7650000216	CDU. FLICKER	○		4	Repair	D
17		1-16	S4240000020	1SET / 1KEY	○		1	Repair	D
18		1-17	S7490000019	USB 4 PORT HUB	○		1	Repair	D
19		1-18	S5220000013	HUMAN DETECT SENSOR	○		1	Repair	E
20		1-19	S7650000117	USB Panel Control Board	○		1	Repair	E
21		1-20	S72328702	INDICATOR FOR System Power Status	○		1	Repair	E
22	Control Electronics	1	S7090000629	CENTROL UNIT (Q87)	○		1	Field	C
23		1-1	S5611000479	Q87 MINI BOARD	○		1	Repair	C
24		1-2	S1010000088	CPU I5-4590S	○		1	Repair	E
25		1-3	S5712000006	MEMORY DDR3L 4GB	○		1	Repair	D
26		1-4	S5633000048	CPU FAN	○		1	Repair	E
27		1-5	S5695000007	SSD 128 G	○		1	Repair	C
28		1-6	S7650000178	7 PORT MINI USB HUB	○		1	Repair	D
29		1-7	S7650000225	4 PORT MINI USB HUB	○		1	Repair	D
30	Bill Recycle Machine (BRM 50)	1	S7430006779	Bill Recycling Machine Upper (BRM50)	○		1	Repair	D
31		1-1	S7430006560	CSM	○		1	Repair	C
32		1-2	S7760000390	PCBA:BRM50 CSM B/D	○		1	Repair	C
33		1-3	S7430006561	SUB_ASSY: OUT_SHUTTER	○		1	Repair	C
34		1-4	S5639000026	SOL: MB-0829-15	○		1	Repair	C

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
35	Bill Recycle Machine (BRM 50)	1-5	S5640000199	STEP_MOTOR:	○		1	Repair	C
36		1-6	S7430006257	TSK Bill Stopper 76mm	○		1	Repair	C
37		1-7	S7000000362	BC	○		1	Repair	C
38		1-8	S7430006269	TOP Transport	○		1	Repair	C
39		1-9	S7430006268	Front Transport	○		1	Repair	C
40		1-10	S7430005867	Outer Shutter	○		1	Repair	C
41		1-11	S7430005876	MAIN FRAME	○		1	Repair	C
42		1-12	S7430006282	UTC	○		1	Repair	C
43		2	S7430006323	Bill Recycling Machine Lower (BRM50)	○		1	Repair	D
44		2-1	S7430006273	BODY MODULE LOWER	○		1	Repair	E
45		2-2	S7430006721	RC width Guide 164	○		4	Repair	C
46		2-3	S7430006280	Reject Cassette	○		1	Repair	C
47		2-4	S7430006274	MID Transport	○		1	Repair	C
48		2-5	S7430006275	BMD Frame	○		1	Repair	C
49		2-6	S4500000697	MOLD SIDE GUIDE RIGHT	○		1	Repair	D
50		2-7	S4500000699	MOLD SIDE GUIDE LEFT	○		1	Repair	C
51		2-8	S4360001959	Front Guide	○		1	Repair	B
52		2-9	S4360001960	Back Guide	○		1	Repair	B
53		2-10	S5510000096	PP MOTOR	○		1	Repair	C
54		2-11	S7760000211	PCBA:BRM50 RC B/D	○		1	Repair	C
55		2-12	S4500000697	MOLD;SIDE_GUIDE_R_164	○		1	Repair	D
56		2-13	S4500000699	MOLD;SIDE_GUIDE_L_164	○		1	Repair	D
57		2-14	S7760000421	PCBA:BRM50 MAIN B/D	○		1	Repair	C
58		2-15	S7760000389	PCBA:BRM50 RBU I/O B/D	○		1	Repair	C
59		2-16	S7760000096	PCBA RC SW B/D	○		1	Repair	C
60		2-17	S7760000447	PCBA:RJC B/D	○		5	Repair	C
61	Check Single Deposit Module (CSM 50)	1	S7127000021	CSM50 WITH BUNDLE	○		1	Field	C
62		1-1	S4370003261	BEZEL FOR CSM50	○		1	Repair	D
63		1-3	S7430004504	SUB_ASSY:MAIN_CSM50	○		1	Repair	D
64		1-4	S7430004986	SUB_ASSY:bundle csm50	○		1	Repair	D
65		1-5	S7430004607	SUB_ASSY:UPPER_PS	○		1	Repair	D
66		1-6	S7430004987	SUB_ASSY:tape_escrow_assy	○		1	Repair	D
67		1-7	S7760000035	Jam Remove Return (SW1)	○		1	Repair	D
		1-8		PS_PRT Free Fire	○				
68		1-9	S7760000322	PCBA:SENSOR_IF B/D : CSM5X	○		1	Repair	D
69		1-10	S7760000318	PCBA:MAIN B/D : CSM5X	○		1	Repair	D

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
70	Check Single Deposit Module (CSM 50)	1-11	S3200003594	Recog BD CPU FAN	○		1	Repair	D
71		1-12	S7760000313	PCBA:CSM5x:RECOG_BD	○		1	Repair	D
72		1-13	S7760000344	PCBA:CSM5x:RECOG_POWER_BD	○		1	Repair	D
73		1-14	S7760000323	PCBA:BM SUB B/D : CSM5X	○		1	Repair	D
74		1-15	S5510000070	Escrow Motor (TEM01)	○		1	Repair	D
75		1-16	S4370002645	K-ASSY:TE_REEL_CCW	○		1	Repair	B
76		1-17	S4370002647	K-ASSY:TE_CW_REEL	○		1	Repair	B
77		1-18	S5640000162	CLEANING SHEET Motor (PSM02)	○		1	Repair	D
78		1-19	S5672000005	CARTRIDGE:INKJET_HP_C6602A	○		1	Repair	D
79		1-20	S5622000006	PRT HEATER	○		1	Repair	D
80		1-21	S5766000072	ETC:FELT_INK_PRT	○		1	Repair	D
81		1-22	S7760000175	PCBA:INK B/D :CSM3X	○		1	Repair	D
82		1-23	S7760000316	PCBA:CSM5X_CST B/D	○		1	Repair	D
83	Card Reader	1	S5645000019	MOTORIZED CARD EADER	○		1	Field	C
84		1-1	S4370003041	BEZEL FOR MCU	○		1	Repair	E
85		1-2	S4970000012	MCU SPONGE	○		1	Repair	E
86		1-3	S5611000313	ANTI-SKIMMING	○		1	Repair	D
87		1-4	S5766000255	ANTI-SHIMMING	○		1	Repair	D
88	Receipt Printer (SPR60)	1	S5409000040	Receipt Printer (SPR 60)	○		1	Field	C
89		1-1	S3200006202	Paper near end sensor	○		1	Repair	D
90		1-2	S4360002022	Spanner	○		1	Repair	D
91		1-3	S4360002023	Roll Shaft	○		1	Repair	D
92		1-4	S7430006392	Tension bar Assembly	○		1	Repair	C
93		1-5	S4360002024	Shaft Block	○		1	Repair	D
94		1-6	S4140009471	K-ASSY SPR ALIGN	○		1	Repair	D
95		1-7	S7430006393	Print mechnism	○		1	Repair	D
96	OPL & SPL Assembly	1	S7100000278	OPL (21.5 INCH)	○		1	Field	B
97		1-1	S4370002502	ASSY FOR DIP FRONT	○		1	Repair	E
98		1-2	S4370002497	ASSY FOR OPL MIDDLE	○		1	Repair	E
99		1-3	S4370002560	BEZEL FOR OPL BACK	○		1	Repair	E
100		1-4	S4370001541	BEZLE FOR FRONT	○		1	Repair	E
101		1-5	S4140009481	BASE FOR 21.5 INCH OPL	○		1	Repair	E
102		1-6	S5661000067	21.5 INCH MONITOR	○		1	Repair	C
103		1-7	S5659000032	TOUCH PANEL	○		1	Repair	D
104		1-8	S4592000009	PRIVACY PAD	○		1	Repair	D
105		1-9	S5766000156	MIROPHONE	○		1	Repair	D

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
106	OPL & SPL Assembly	1-10	S3200001804	OPL FAN CABLE	○		1	Repair	D
107		1-11	S3300000098	CCD CAMERA CABLE	○		1	Repair	E
108		1-12	S3328000009	DVI-D CABLE	○		1	Repair	E
109		2	S7110000057	SPL (10.4')	○		1	Field	D
110		2-1	S4140009644	BASE 10.4	○		1	Repair	E
111		2-2	S44925203	HANDLE	○		1	Repair	E
112		2-3	S5661000095	10.4 INCH LED	○		1	Repair	D
113		2-4	S5611000511	10.4 INCH HDMI BOARD	○		1	Repair	D
114		2-5	S5611000166	TOUCH CONTROL BOARD	○		1	Repair	D
115		2-6	S5659000055	TOUCH SCREEN (10.4 INCH)	○		1	Repair	D
116	Safety Body	1	S3353000022	MODULAR COUPLER	○		2	Repair	E
117		2	S4901000096	KABA-MAS SHUNTED LOCK	○		1	Repair	C
118		3	S4530000013	T-Handle to open Safety Door	○		1	Repair	E
119		4	S5626000003	SEISMIC DECTOR	○		1	Repair	D
120		5	S3200006597	Cable for Heat & Seismic Sensor	○		1	Repair	D
121		6	S3356000014	Terminal Block	○		1	Repair	D
122	Miscellaneous	1	S5621000059	Power Supply (P/S)	○		1	Field	D
123		2	S7200003279	Battery Assembly	○		1	Repair	D
124		3	S3325000043	POWER CORD	○		1	Repair	D
125		4	S4370003250	OURDOOR - SAFE	○		1	Repair	D
126		5	S7430006173	INTERFACE	○		1	Repair	D
127		6	S3305000045	CCD CAMERA CABLE	○		1	Repair	D
128		7	S5672000005	CARTRIDGE:INKJET_HP_C6602A	○		1	Repair	D

※ Category
- ✓ Field : Parts can be available to replace at the field.
- ✓ Repair : Parts cannot be replace in the field and it has to replace at Repair Center or Depot

※ QTY
- ✓ The quantity which it needs to make one ATM.

※ Recommended QTY
- ✓ It is a rate for Parts quantity when Customer operates 100 ATMs for one year.
  [A : 4% / B : 3% / C : 2% / D : 1.5% / E : 1%]

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 1. Fascia Assembly

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
1	Fascia Assembly	1	S7134000702	FRONT ASSEMBLY	○		1	Field	C
2		1-1	S4370003260	BEZEL FOR FRONT	○		1	Repair	E
3		1-2	S4370002035	BEZEL FOR BUTTON	○		1	Repair	E
4		1-3	S4370002034	BEZEL FOR VOLUME	○		1	Repair	E
5		1-4	S7130220100	Encryption PIN pad (TR39)	○		1	Repair	C
6		1-5	S4140009450	BRKT FOR EPP	○		1	Repair	D
7		1-6	S5412000054	VIVOPAY KIOSK3	○		1	Repair	E
8		1-7	S5404000019	2D BARCODE	○		1	Repair	D
9		1-8	S7650000223	SHUTTER FLICKER	○		1	Repair	E
10		1-9	S7650000236	MCU FLICKER	○		1	Repair	E
11		1-10	S5611000360	VOICE I/F BOARD	○		1	Repair	E
12		1-11	S5611000361	ADA VOLUME BOARD	○		1	Repair	E
13		1-12	S5611000211	DMIB BOARD	○		1	Repair	D
14		1-13	S5611000365	CCD CAMEARA	○		1	Repair	D
15		1-14	S4310000714	COVER FOR SHIELD - PRIVACY	○		2	Repair	D
16		1-15	S7650000216	CDU. FLICKER	○		4	Repair	D
17		1-16	S4240000020	1SET / 1KEY	○		1	Repair	D
18		1-17	S7490000019	USB 4 PORT HUB	○		1	Repair	D
19		1-18	S5220000013	HUMAN DETECT SENSOR	○		1	Repair	E
20		1-19	S7650000117	USB Panel Control Board	○		1	Repair	E
21		1-20	S72328702	INDICATOR FOR System Power Status	○		1	Repair	E

1

2



3

4



5

6



7

8

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

9



10



11

12

13



14

15

16



17

18

19

20

21



Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 2. Control Electronics

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
22	Control Electronics	1	S7090000629	CENTROL UNIT (Q87)	○		1	Field	C
23		1-1	S5611000479	Q87 MINI BOARD	○		1	Repair	C
24		1-2	S1010000088	CPU I5-4590S	○		1	Repair	E
25		1-3	S5712000006	MEMORY DDR3L 4GB	○		1	Repair	D
26		1-4	S5633000048	CPU FAN	○		1	Repair	E
27		1-5	S5695000007	SSD 128 G	○		1	Repair	C
28		1-6	S7650000178	7 PORT MINI USB HUB	○		1	Repair	D
29		1-7	S7650000225	4 PORT MINI USB HUB	○		1	Repair	D

22

23



24



25

26



27

28

29

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 3. Bill Recycler Module (BRM)

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
30	Bill Recycle Machine (BRM 50)	1	S7430006779	Bill Recycling Machine Upper (BRM50)	○		1	Repair	D
31		1-1	S7430006560	CSM	○		1	Repair	C
32		1-2	S7760000390	PCBA:BRM50 CSM B/D	○		1	Repair	C
33		1-3	S7430006561	SUB_ASSY: OUT_SHUTTER	○		1	Repair	C
34		1-4	S5639000026	SOL: MB-0829-15	○		1	Repair	C
35		1-5	S5640000199	STEP_MOTOR:	○		1	Repair	C
36		1-6	S7430006257	TSK Bill Stopper 76mm	○		1	Repair	C
37		1-7	S7000000362	BC	○		1	Repair	C
38		1-8	S7430006269	TOP Transport	○		1	Repair	C
39		1-9	S7430006268	Front Transport	○		1	Repair	C
40		1-10	S7430005867	Outer Shutter	○		1	Repair	C
41		1-11	S7430005876	MAIN FRAME	○		1	Repair	C
42		1-12	S7430006282	UTC	○		1	Repair	C
43		2	S7430006323	Bill Recycling Machine Lower (BRM50)	○		1	Repair	D
44		2-1	S7430006273	BODY MODULE LOWER (NO RC & RJC)	○		1	Repair	E

30



31



32

33



34



35



36



37

38



39



40

41



Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

42



43



44



Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
45	Bill Recycle Machine (BRM 50)	2-2	S7430006721	RC width Guide 164	○		4	Repair	C
46		2-3	S7430006280	Reject Cassette	○		1	Repair	C
47		2-4	S7430006274	MID Transport	○		1	Repair	C
48		2-5	S7430006275	BMD Frame	○		1	Repair	C
49		2-6	S4500000697	MOLD SIDE GUIDE RIGHT	○		1	Repair	D
50		2-7	S4500000699	MOLD SIDE GUIDE LEFT	○		1	Repair	C
51		2-8	S4360001959	Front Guide	○		1	Repair	B
52		2-9	S4360001960	Back Guide	○		1	Repair	B
53		2-10	S5510000096	PP MOTOR	○		1	Repair	C
54		2-11	S7760000211	PCBA:BRM50 RC B/D	○		1	Repair	C
55		2-12	S4500000697	MOLD;SIDE_GUIDE_R_164	○		1	Repair	D
56		2-13	S4500000699	MOLD;SIDE_GUIDE_L_164	○		1	Repair	D
57		2-14	S7760000421	PCBA:BRM50 MAIN B/D	○		1	Repair	C
58		2-15	S7760000389	PCBA:BRM50 RBU I/O B/D	○		1	Repair	C
59		2-16	S7760000096	PCBA RC SW B/D	○		1	Repair	C
60		2-17	S7760000447	PCBA:RJC B/D	○		5	Repair	C

45

46

47



48



49



50

51



52



53



54



55



56

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

57

58

59

60

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 4. Check Single Deposit Module (CSM 50)

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
61	Check Single Deposit Module (CSM 50)	1	S7127000021	CSM50 WITH BUNDLE	○		1	Field	C
62		1-1	S4370003261	BEZEL FOR CSM50	○		1	Repair	D
63		1-3	S7430004504	SUB_ASSY:MAIN_CSM50	○		1	Repair	D
64		1-4	S7430004986	SUB_ASSY:bundle csm50	○		1	Repair	D
65		1-5	S7430004607	SUB_ASSY:UPPER_PS	○		1	Repair	D
66		1-6	S7430004987	SUB_ASSY:tape_escrow_assy	○		1	Repair	D
67		1-7	S7760000035	Jam Remove Return (SW1)	○		1	Repair	D
		1-8		PS_PRT Free Fire	○				
68		1-9	S7760000322	PCBA:SENSOR_IF B/D : CSM5X	○		1	Repair	D
69		1-10	S7760000318	PCBA:MAIN B/D : CSM5X	○		1	Repair	D
70		1-11	S3200003594	Recog BD CPU FAN	○		1	Repair	D
71		1-12	S7760000313	PCBA:CSM5x:RECOG_BD	○		1	Repair	D
72		1-13	S7760000344	PCBA:CSM5x:RECOG_POWER_BD	○		1	Repair	D
73		1-14	S7760000323	PCBA:BM SUB B/D : CSM5X	○		1	Repair	D
74		1-15	S5510000070	Escrow Motor (TEM01)	○		1	Repair	D
75		1-16	S4370002645	K-ASSY:TE_REEL_CCW	○		1	Repair	B
76		1-17	S4370002647	K-ASSY:TE_CW_REEL	○		1	Repair	B
77		1-18	S5640000162	CLEANING SHEET Motor (PSM02)	○		1	Repair	D
78		1-19	S5672000005	CARTRIDGE:INKJET_HP_C6602A	○		1	Repair	D
79		1-20	S5622000006	PRT HEATER	○		1	Repair	D
80		1-21	S5766000072	ETC:FELT_INK_PRT	○		1	Repair	D
81		1-22	S7760000175	PCBA:INK B/D :CSM3X	○		1	Repair	D
82		1-23	S7760000316	PCBA:CSM5X_CST B/D	○		1	Repair	D

61

62



63



64



65



66



67

68



Copyright© Nautilus Hyosung Inc. 2016 All right reserved.

69

70



71

72

73



74



75



76



77



78

79



80

81

82

Copyright© Nautilus Hyosung Inc. 2016 All right reserved.

Chapter 5. Card Reader (MCU)

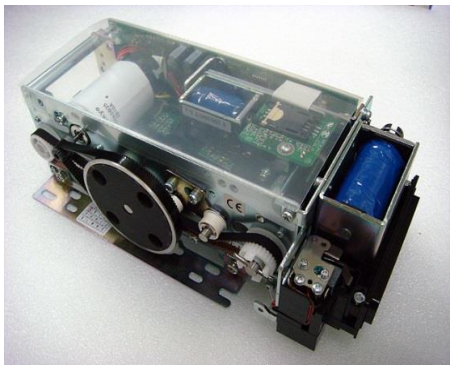

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
83	Card Reader	1	S5645000019	MOTORIZED CARD EADER	○		1	Field	C
84		1-1	S4370003041	BEZEL FOR MCU	○		1	Repair	E
85		1-2	S4970000012	MCU SPONGE	○		1	Repair	E
86		1-3	S5611000313	ANTI-SKIMMING	○		1	Repair	D
87		1-4	S5766000255	ANTI-SHIMMING	○		1	Repair	D

83

84



85



86

87

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 6. Receipt Printer

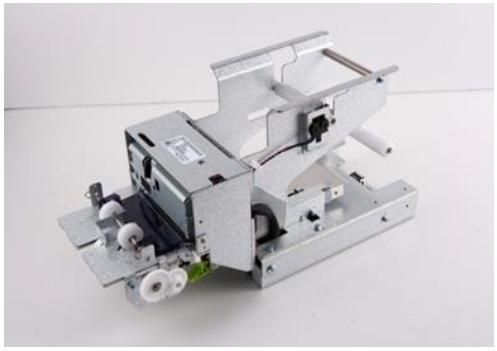

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
88	Receipt Printer (SPR60)	1	S5409000040	Receipt Printer (SPR 60)	○		1	Field	C
89		1-1	S3200006202	Paper near end sensor	○		1	Repair	D
90		1-2	S4360002022	Spanner	○		1	Repair	D
91		1-3	S4360002023	Roll Shaft	○		1	Repair	D
92		1-4	S7430006392	Tension bar Assembly	○		1	Repair	C
93		1-5	S4360002024	Shaft Block	○		1	Repair	D
94		1-6	S4140009471	K-ASSY SPR ALIGN	○		1	Repair	D
95		1-7	S7430006393	Print mechnism	○		1	Repair	D

88

89



90

91

92

93

94

95

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 7. OPL/SPL Assembly

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
96	OPL & SPL Assembly	1	S7100000278	OPL (21.5 INCH)	○		1	Field	B
97		1-1	S4370002502	ASSY FOR DIP FRONT	○		1	Repair	E
98		1-2	S4370002497	ASSY FOR OPL MIDDLE	○		1	Repair	E
99		1-3	S4370002560	BEZEL FOR OPL BACK	○		1	Repair	E
100		1-4	S4370001541	BEZLE FOR FRONT	○		1	Repair	E
101		1-5	S4140009481	BASE FOR 21.5 INCH OPL	○		1	Repair	E
102		1-6	S5661000067	21.5 INCH MONITOR	○		1	Repair	C
103		1-7	S5659000032	TOUCH PANEL	○		1	Repair	D
104		1-8	S4592000009	PRIVACY PAD	○		1	Repair	D
105		1-9	S5766000156	MIROPHONE	○		1	Repair	D
106		1-10	S3200001804	OPL FAN CABLE	○		1	Repair	D
107		1-11	S3300000098	CCD CAMERA CABLE	○		1	Repair	E
108		1-12	S3328000009	DVI-D CABLE	○		1	Repair	E
109		2	S7110000057	SPL (10.4')	○		1	Field	D
110		2-1	S4140009644	BASE 10.4	○		1	Repair	E
111		2-2	S44925203	HANDLE	○		1	Repair	E
112		2-3	S5661000095	10.4 INCH LED	○		1	Repair	D
113		2-4	S5611000511	10.4 INCH HDMI BOARD	○		1	Repair	D
114		2-5	S5611000166	TOUCH CONTROL BOARD	○		1	Repair	D
115		2-6	S5659000055	TOUCH SCREEN (10.4 INCH)	○		1	Repair	D

96

97



98



99



100



101



102

103



Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

104

105

106

107



108



109

110



111

112



113

114

115



Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 8. Safety Body

Copyright© Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
116	Safety Body	1	S3353000022	MODULAR COUPLER	○		2	Repair	E
117		2	S4901000096	KABA-MAS SHUNTED LOCK	○		1	Repair	C
118		3	S4530000013	T-Handle to open Safety Door	○		1	Repair	E
119		4	S5626000003	SEISMIC DECTOR	○		1	Repair	D
120		5	S3200006597	Cable for Heat & Seismic Sensor	○		1	Repair	D
121		6	S3356000014	Terminal Block	○		1	Repair	D

116

117

118

119

120



121



Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

Chapter 9. Miscellaneous

Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.

No	Unit	LEVEL	Part No.	Customer Description	TYPE		QTY	Category	Recommended QTY
					A	B			
122	Miscellaneous	1	S5621000059	Power Supply (P/S)	○		1	Field	D
123		2	S7200003279	Battery Assembly	○		1	Repair	D
124		3	S3325000043	POWER CORD	○		1	Repair	D
125		4	S4370003250	OURDOOR - SAFE	○		1	Repair	D
126		5	S7430006173	INTERFACE	○		1	Repair	D
127		6	S3305000045	CCD CAMERA CABLE	○		1	Repair	D
128		7	S5672000005	CARTRIDGE:INKJET_HP_C6602A	○		1	Repair	D

122

123

124



125



126



127

128



Copyrightⓒ Nautilus Hyosung Inc. 2017 All right reserved.